

AB Foil®


Aluminium foil AB - 631 D/S FR

PRODUCT DESCRIPTION


A double-sided, medium weight, fire retardant EVA adhesive, Fiberglass scrim reinforcement reflective aluminium foil laminate.

PRODUCT COMPOSITION

The layer are two layers aluminium foil, one layer kraft paper, one layer square Fiberglass scrim reinforcement and two layers fire retardant EVA adhesive.

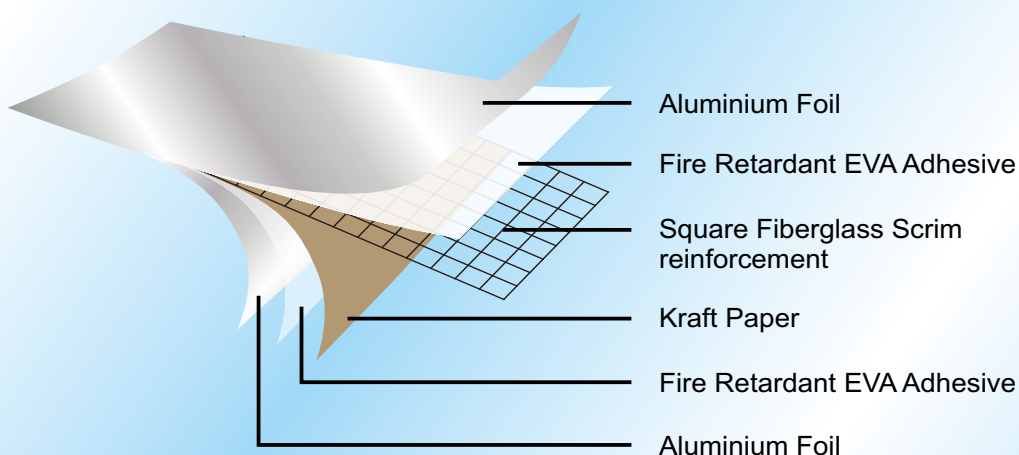

Cool - Comfort - Energy Saving

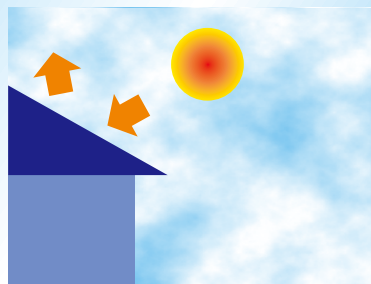

AB Foil®

Aluminium foil AB - 63 ID/S FR

RECOMMENDED APPLICATION

1. As a thermal insulation membrane for air condition ducting and roofing materials.
2. As a vapour barrier and sarking membrane.
3. As an acoustic barrier when used with other bulk thermal insulation materials.

PHYSICAL PROPERTIES : (Typical only-not the guaranteed minimum)

Width	1250	mm
Length	60	m
Area	75	m ²
Basic Weight	228	gsm
Nominal Mass	13.95	Kg
Tensile Strength		
- Longitudinal direction	14	KN/M
- Transverse direction	9.0	KN/M
Thickness	0.30	mm
Water Vapour Transmission Rate	0.004	g/m ² /24 hours
Reflectivity	95	%
Emissivity	5	%
CLASSIFICATION FIRE HAZARD		
BS 476 : Part 6 & 7		CLASS ONE



PT. ADIMAS ISOLASITAMA

AUTHORIZED DISTRIBUTOR

INSULATION, BUILDING, AIRCON & INDUSTRIAL INSTALLATION MATERIALS

Jl. Pangeran Jayakarta 131 - A / 11, Jakarta 10730 - INDONESIA

Telp. (021) 6257888 (H), 6397888 (H) Fax. (021) 6258836 - 6393079

sms customer care : 081213157888

E-mail : info@adimas.co.id

website : www.adimas.co.id

ALSO AVAILABLE : AB Wool, AB Tape, AB Mesh, ABR Rockwool, Insulflex