

AB Foil®



Aluminium foil AB - 721 D/S

PRODUCT DESCRIPTION


A double-sided, light weight, reinforced, reflective aluminium foil laminate.

PRODUCT COMPOSITION (4 layers)

The layer are two layers aluminium foil, one layer kraft paper, one layer with cross-line glass fiber yarn reinforcement.

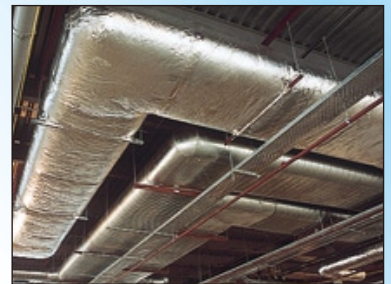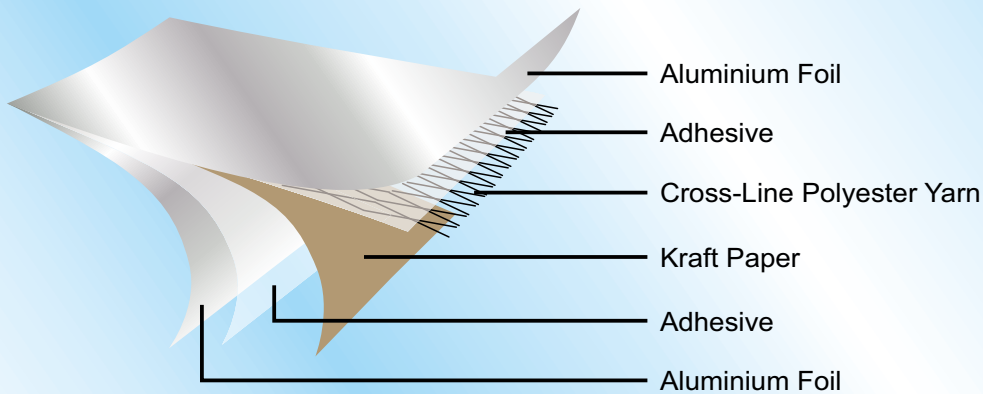

Cool - Comfort - Energy Saving

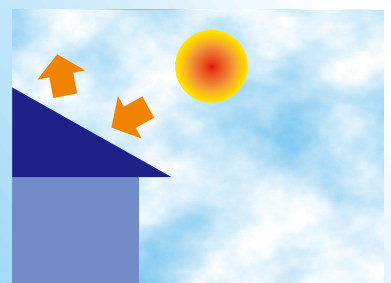

AB Foil®


Aluminium foil AB - 721D/S

RECOMMENDED APPLICATION

1. As a thermal insulation membrane for air condition ducting and roofing materials.
2. As a vapour barrier and sarking membrane.
3. As an acoustic barrier when used with other bulk thermal insulation materials.

PHYSICAL PROPERTIES : (Typical only-not the guaranteed minimum)

Width	1250	mm
Length	60	m
Area	75	m ²
Basic Weight	199	gsm
Nominal Mass	13.6	Kg
Tensile Strength		
- Longitudinal direction	10.5	KN/M
- Transverse direction	4.0	KN/M
Thickness	0.28	mm
Water Vapour Transmission Rate	0.004	g/m ² /24 hours
Reflectivity	95	%
Emissivity	5	%

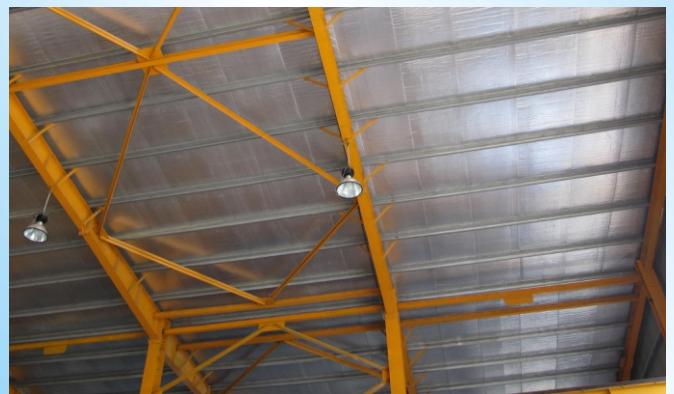

PT. ADIMAS ISOLASITAMA

AUTHORIZED DISTRIBUTOR

INSULATION, BUILDING, AIRCON & INDUSTRIAL INSTALLATION MATERIALS

Jl. Pangeran Jayakarta 131 - A / 11, Jakarta 10730 - INDONESIA

Telp. (021) 6257888 (H), 6397888 (H) Fax. (021) 6258836 - 6393079

sms customer care : 081213157888

E-mail : info@adimas.co.id

website : www.adimas.co.id

ALSO AVAILABLE : AB Wool, AB Tape, AB Mesh, ABR Rockwool, Insulflex